



奧迪美®

# 瓷磚填縫劑色系


## TILE GROUT COLOUR CHART

### 顏色組別 Colour Group 1


另有多種顏色可供選擇 More colours are available




#00 白色  
White



#20 杏色  
Almond



#10 淺灰色  
Light Grey



#22 桃紅色  
Peach




#12 灰色  
Grey



#30 骨色  
Bone



#14 深灰色  
Dark Grey



#32 淺黃色  
Buff

### 顏色組別 Colour Group 2



#16 碳灰色  
Charcoal



#62 粉紅色  
Pink



#26 橙色  
Orange




#64 玫瑰色  
Rose



#34 黃色  
Yellow




#70 黃褐色  
Tan



#50 淺綠色  
Light Green




#72 咖啡色  
Chocolate



#52 蘋果綠色  
Apple Green



#74 紅棕色  
Brick



#54 綠色  
Green



#76 棕色  
Brown



#60 乳白色  
Opal



#80 淺藍色  
Light Blue

### 顏色組別 Colour Group 3



#82 藍色  
Blue



#90 黑色  
Black

#### 重點注意 Important Note:

- 上述色條顏色僅供參考，最終成品顏色取決於各種條件因素，例如：實際施工環境、施工技巧、瓷磚特性、用水量、清潔步驟和養護條件等。  
The above colours are for general reference only. Final colour might vary because of various factors and conditions, e.g. site conditions, installation skills, tile characteristics, water dosage in mixing, cleaning steps and curing conditions.
- 在正式施工前應先作小面積的試驗以確保施工的方法和成品顏色無誤，特別是染色的瓷磚或石材。  
Trial is recommended to verify the application and final colour of the product prior to applying in large scale, especially for stainable tiles and stones.

\*售價或按顏色組別而有不同 Price varies according to the colour group

奧迪美集團有限公司 OPTIMIX GROUP LIMITED

☎ (852)2395 5388 🛒 (852)2802 6433 🏠 (852)2802 6408

🌐 www.optimix.com.hk



WECHAT



WEBSITE



LINKEDIN



奧迪美®

# TG410E 高效彩色防霉填縫劑 TILE GROUT (HIGH PERFORMANCE)

## 產品說明 Product Description

奧迪美 TG410E 高效彩色防霉填縫劑 是用於填充瓷磚、馬賽克、水磨石等天然石材和人造石的填縫。

OPTIMIX TG410E TILE GROUT (HIGH PERFORMANCE) is designed for filling tile joints in ceramic, mosaic, terrazzo tiles and natural stones.



## 主要優點 Features & Benefits

- 高效防滲、防菌防霉及抗泛鹼性 Resistant to water, mould growth and efflorescence
- 品質穩定及顏色持久 Consistent quality & long-lasting colours
- 高效施工及低收縮率 Good workability & low shrinkage

## 施工 Application


- 用橡膠填縫刀或刮刀以環型轉動方式填滿瓷磚間的縫隙  
Fill the tile joints in a diagonal motion with a rubber squeegee
- 不要使用洗石水、帶有酸性或腐蝕性的石面清潔劑  
Use of acidic tile cleaners is not recommended

## 用途及執行標準 Usage & Complied Standards

混凝土基面  
Concrete Wall

奧迪美瓷磚黏結劑  
OPTIMIX  
Tile Adhesive

奧迪美填縫劑  
OPTIMIX  
Tile Grout

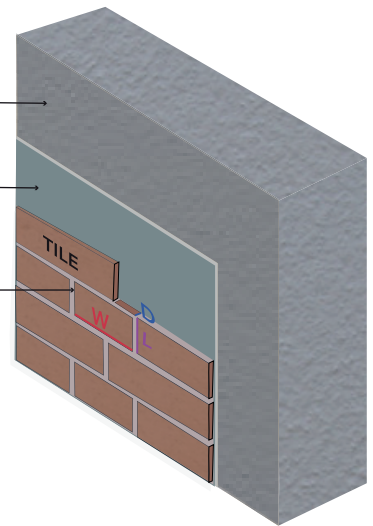

種類 Type	• Standard (E) • Coarse (EC) • Fine (EF) • Enhanced anti-efflorescence (ES)	標準型 粗糙型 特細型 加強防泛鹼性能
------------	--	------------------------------

縫隙寬度 Usage	• Standard : 填充寬度可達10mm • Coarse : 填充寬度可達15mm • Fine : 填充寬度可達5mm	Grout tile joints up to 10mm wide Grout tile joints up to 15mm wide Grout tile joints up to 5mm wide, with finer surface
---------------	--	--

執行標準 Complied Standards	• BS EN 13888 CG2 WA • BS 5980 : 1980 • BS 6920 : 2014	• ANSI A118.6 : 1992 • JC/T 1024 : 2007 • USEPA Method 24
----------------------------	--	---

\*以上產品均可選擇加強抗泛鹼性能 Enhanced anti-efflorescence option available for the above products.

## 參考用量 Coverage

$$\text{每平方米用量} = 1.5 \text{ kg} \times \frac{\text{磚縫闊度}}{\text{joint width}} \times \frac{\text{瓷磚厚度}}{\text{tile depth}} \times \left( \frac{\text{瓷磚長度} + \text{瓷磚闊度}}{\text{tile length} \times \text{tile width}} \right)$$



CIC GREEN  
PRODUCT CERTIFICATION  
CICGPC-L-22402(A&S)

奧迪美集團有限公司 OPTIMIX GROUP LIMITED

☎ (852)2395 5388 🛒 (852)2802 6433 📞 (852)2802 6408

🌐 www.optimix.com.hk



WECHAT



WEBSITE



LINKEDIN